



# GUARDIAN DOME DIFF NON DIM

GTBTDMN-6X3-84-15W

- Australian made and engineered
- Quality luminaire made from zinc plated cold rolled steel
- Zhaga compatible LED board footprint allows for easy maintenance and supports a circular economy
- Latest in Samsung LED chips boast a long life providing 53,000hr L90B10 in ambient temperatures of 40 degrees
- External mounted LED driver allows for easy maintenance and removes the heat source to increase reliability and lifetime
- Wide aperture diffuser provides soft-light output
- This fitting can be engineered to meet the installation requirements with custom lengths, widths and air slot positions



## PROJECT INFORMATION

|              |                                   |
|--------------|-----------------------------------|
| Project Name | LED DIRECT-<br>GTBTDMN-6X3-84-15W |
| Fixture Type | TROFFER DOME DIFFUSER             |

## ORDERING INFORMATION

|                  |                                                                                         |
|------------------|-----------------------------------------------------------------------------------------|
| Order code       | GTBTDMN-6X3-84-15W                                                                      |
| Description      | GUARDIAN DOME DIFF NON<br>DIM 15.9W Troffer / 595mm x<br>295mm / 4000k / 80cri / 2210lm |
| Driver Type      | Fixed output                                                                            |
| Included options | Standard Diffuser, Standard<br>Fixed Output Driver, F&P 2C<br>(1M)                      |

## EFFICIENCIES

|                         |          |
|-------------------------|----------|
| Total System Efficiency | 138 lm/W |
|-------------------------|----------|

The performance of each component of a luminaire is demonstrated through its efficiencies, which together determine the total system efficiency of the product. The output of the LED chip is first multiplied by the optical and thermal efficiencies to calculate the Luminaire efficiency. However, this calculation does not consider the driver efficiency. To determine the overall efficiency of the system, the Luminaire efficiency must be multiplied by the driver efficiency, which accounts for all losses in the system.

## MECHANICAL

|                   |                     |
|-------------------|---------------------|
| Body Material     | Zinc Annealed Steel |
| Diffuser Material | PMMA                |
| Product Finish    | Powder coated       |
| Fitting Colour    | Mannex White        |
| Installation Type | Recessed            |
| IP Rating         | IP44                |

## ELECTRICAL

|                                                                                                                                                               |              |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Electrical Rating                                                                                                                                             | Class II     |
| Input Frequency                                                                                                                                               | 50 Hz        |
| Input voltage                                                                                                                                                 | 230Vac       |
| In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6% |              |
| Maximum Wattage                                                                                                                                               | 15.9 W       |
| Power Factor                                                                                                                                                  | 0.95         |
| Working Temp Range                                                                                                                                            | -25 to 40 °C |



## LAMP

|                              |                        |
|------------------------------|------------------------|
| Macadam Steps (SDCM)         | 3-step MacAdam Ellipse |
| CCT Configuration            | Single                 |
| Colour Rendering Index (CRI) | >80                    |

## LED LIFETIME

|              |             |
|--------------|-------------|
| LED Lifetime | >54,000 hrs |
|--------------|-------------|

This is the Reported LED Lifetime in Hours based on TM-21. LED DIRECT SOLUTIONS does not list the projected or calculated LED lifetime, which is normally longer as TM-21 Addendum B explicitly states "The Calculated and Projected Lp(Dk) are not to be reported". This Lifetime refers to the life of a single LED however the system life is longer since the probability and binomial distribution of all LEDs in the system means that the average led is performing above the specification and compensates for the LEDs falling below.

|                   |            |            |
|-------------------|------------|------------|
| Ambient Temp (°C) | 25 °C      | 40 °C      |
| L90B10            | 53,000 hrs | 53,000 hrs |

This rating defines the performance of the led within its lifetime. L relates to lumen depreciation, where the proceeding number gives the resultant lumen output at the end of it reported lifetime. L70, would mean 30% lumen depreciation which means 70% of its initial output and is tested accordingly to TM-21. The B part refers to failures, which can be define as the percentage of LEDs which fall below the L value in the projected lifetime. A value of B10 refers to 10% failure and a value of B50 refers to 50% failure. After the defined lifetime, the system will reach the defined lumen depreciation and the average led failures is defined by the B rating. The B rating is defined in and tested to IEC62717.

|                  |          |
|------------------|----------|
| TM-21 Test Hours | 9000 hrs |
|------------------|----------|

## COLOUR TEMPERATURE

|                  |         |
|------------------|---------|
| CCT              | 4000 K  |
| Luminaire Lumens | 2210 lm |

All photometric data has a tolerance of  $\pm 10\%$ . Luminaire lumens refers to the exit lumens or delivered lumens from the luminaire.

## DRIVER

|                            |                  |
|----------------------------|------------------|
| Dimmable                   | No               |
| Driver Included            | Yes              |
| Driver Mode                | Constant Current |
| Driver Type                | Fixed output     |
| Flex & Plug or Lead Length | 1000 mm          |
| Wiring Type                | F&P 2C (1M)      |

## COMPLIANCE

|                     |          |
|---------------------|----------|
| Product Design Life | 10 years |
|---------------------|----------|

The product design life relates to the total product life which includes LEDs, drivers and the enclosure. This is different to the LED lifetime which only refers to the economical lifetime of the LEDs at which time the lumen output has dropped below the L Value. The product design life is calculated at the maximum ambient or working temperature of the product and takes into account the Daily Use.

|           |        |
|-----------|--------|
| Daily Use | 13 hrs |
|-----------|--------|

The Daily Use is the recommended time required to meet the product's design life. Installations can exceed this time, however the product design life will be reduced proportionally.

|           |                                                                                                                                         |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Standards | AS/NZS 60598.1<br>AS/NZS 60598.2.2<br>AS/NZS 61347.1<br>AS/NZS 61347.2.13<br>IEC/TR 62778<br>IEC 62031<br>AS/NZS 61535.1<br>AS CISPR 15 |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------------|

## WARRANTY

|                         |                       |
|-------------------------|-----------------------|
| Commercial Use Warranty | 5 RTB (Total 5 Years) |
|-------------------------|-----------------------|

|                          |           |
|--------------------------|-----------|
| Warranty Operating Hours | 40000 hrs |
|--------------------------|-----------|

This product is provided with a warranty up until the stated warranty period or until the stated warranty operating hours has been reached (whichever occurs first).

## DIMENSIONS


|                |        |
|----------------|--------|
| Product Height | 97 mm  |
| Product Length | 595 mm |
| Product Width  | 295 mm |

All dimensions are +/- 1mm.

## PHOTOMETRICS




260mm x 547mm



C Halfplanes

180.0 0.0  
270.0 90.0

Flux 2207 lm  
Maximum 346.52 cd/klm  
Position C=70.00 G=1.00  
Efficiency: 100.00%  
Date: 23-10-2022  
Double Symmetrical

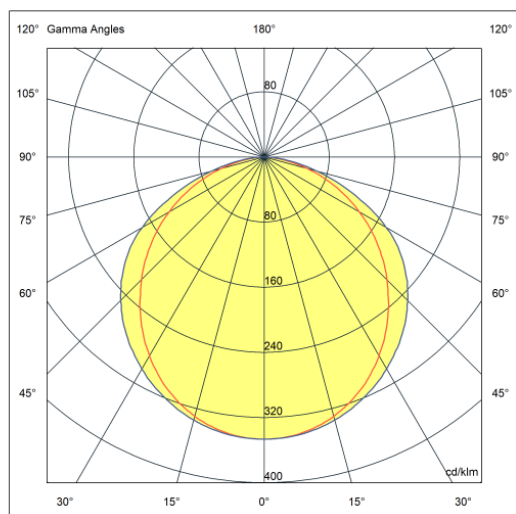

## ACCESSORIES

|             |                                 |
|-------------|---------------------------------|
| Description | PLASTER KIT / 600 X 300 / White |
| Item Code   | PFK-6x3                         |



UGR

| Reflectancies  |                  |      |      |      |      |                |      |      |      |      |
|----------------|------------------|------|------|------|------|----------------|------|------|------|------|
| Ceiling/Cavity | 0.7              | 0.7  | 0.5  | 0.5  | 0.3  | 0.7            | 0.7  | 0.5  | 0.5  | 0.3  |
| Walls          | 0.5              | 0.3  | 0.5  | 0.3  | 0.3  | 0.5            | 0.3  | 0.5  | 0.3  | 0.3  |
| WorkingPlane   | 0.2              | 0.2  | 0.2  | 0.2  | 0.2  | 0.2            | 0.2  | 0.2  | 0.2  | 0.2  |
| Room Dim.      | Viewed Crosswise |      |      |      |      | Viewed Endwise |      |      |      |      |
| x=2H y=2H      | 17.7             | 19.0 | 18.0 | 19.3 | 19.5 | 18.8           | 20.1 | 19.1 | 20.4 | 20.6 |
| x=2H y=3H      | 19.2             | 20.4 | 19.5 | 20.6 | 20.9 | 20.3           | 21.5 | 20.7 | 21.8 | 22.1 |
| x=2H y=4H      | 19.7             | 20.9 | 20.0 | 21.1 | 21.4 | 20.9           | 22.0 | 21.2 | 22.3 | 22.6 |
| x=2H y=6H      | 20.1             | 21.2 | 20.4 | 21.4 | 21.8 | 21.2           | 22.3 | 21.6 | 22.6 | 22.9 |
| x=2H y=8H      | 20.2             | 21.2 | 20.6 | 21.5 | 21.9 | 21.4           | 22.4 | 21.7 | 22.7 | 23.0 |
| x=2H y=12H     | 20.2             | 21.2 | 20.6 | 21.6 | 21.9 | 21.4           | 22.4 | 21.8 | 22.7 | 23.0 |
| x=4H y=2H      | 18.6             | 19.8 | 18.9 | 20.0 | 20.3 | 19.4           | 20.6 | 19.8 | 20.9 | 21.1 |
| x=4H y=3H      | 20.3             | 21.3 | 20.7 | 21.6 | 21.9 | 21.2           | 22.2 | 21.6 | 22.5 | 22.8 |
| x=4H y=4H      | 21.0             | 21.9 | 21.4 | 22.2 | 22.6 | 21.9           | 22.7 | 22.3 | 23.1 | 23.5 |
| x=4H y=6H      | 21.6             | 22.3 | 22.0 | 22.7 | 23.1 | 22.4           | 23.1 | 22.8 | 23.5 | 23.9 |
| x=4H y=8H      | 21.7             | 22.4 | 22.1 | 22.8 | 23.2 | 22.5           | 23.2 | 22.9 | 23.6 | 24.0 |
| x=4H y=12H     | 21.8             | 22.4 | 22.3 | 22.8 | 23.3 | 22.6           | 23.2 | 23.0 | 23.6 | 24.1 |
| x=8H y=4H      | 21.4             | 22.1 | 21.9 | 22.5 | 22.9 | 22.2           | 22.9 | 22.6 | 23.2 | 23.7 |
| x=8H y=6H      | 22.1             | 22.7 | 22.6 | 23.1 | 23.6 | 22.8           | 23.4 | 23.2 | 23.8 | 24.2 |
| x=8H y=8H      | 22.4             | 22.9 | 22.9 | 23.3 | 23.8 | 23.0           | 23.5 | 23.5 | 24.0 | 24.4 |
| x=8H y=12H     | 22.6             | 23.0 | 23.1 | 23.5 | 24.0 | 23.2           | 23.6 | 23.6 | 24.1 | 24.6 |
| x=12H y=4H     | 21.5             | 22.1 | 21.9 | 22.5 | 23.0 | 22.2           | 22.8 | 22.6 | 23.2 | 23.7 |
| x=12H y=6H     | 22.2             | 22.7 | 22.7 | 23.2 | 23.6 | 22.9           | 23.3 | 23.3 | 23.8 | 24.3 |
| x=12H y=8H     | 22.5             | 23.0 | 23.0 | 23.4 | 23.9 | 23.1           | 23.5 | 23.6 | 24.0 | 24.5 |
| Variations     |                  |      |      |      |      |                |      |      |      |      |
| S = 1.0 H      | 0.6 / -1.9       |      |      |      |      | 0.5 / -1.7     |      |      |      |      |
| S = 1.5 H      | 0.9 / -3.4       |      |      |      |      | 0.8 / -3.2     |      |      |      |      |
| S = 2.0 H      | 1.1 / -4.3       |      |      |      |      | 1.1 / -4.1     |      |      |      |      |
| Std. Table     | BK06             |      |      |      |      | BK05           |      |      |      |      |
| Addendum Cor.  | 5.1              |      |      |      |      | 5.4            |      |      |      |      |

AS/NZS 1680.2 specifies the UGR value is rounded by +/- 1.5. For example values between 20.5 and 23.5 are considered to be UGR 22. The data in the table below lists the corrected UGR values.