

LED DIRECT

OFFICE LIGHTING

**Guardian
HWLED**

HAWK WING



Guardian HWLED

HAWK WING

Our Hawk Wing LED troffer is now available and has been developed to offer a soft uniform light. Utilising the latest technology we have developed a modern looking fitting and a slim body with a maximum height of only 76mm for ease of installation in the smallest of ceiling cavities. Twin strip LED with frosted inlaid diffuser making this fitting a very stylish and efficient solution for any commercial lighting application.

Can be configured to suit your requirements.

Size, SR (Organic Response), Airslots, Colour Temperature.



STANDARD FEATURES

- 0.7mm Zinc Anneal Steel Body
- Powder coated matt white
- Frosted Diffuser
- Fits Metric T-Bars
- 5 Year warranty
- Philips Running Gear

OPTIONS

- Colour temperature options (kelvin)
- Dimming options
- Sensing options
- Powder coating colour options
- Plug & lead options
- This fitting can be modified to order please contact our sales department for your requirements

COMPLIANCE / APPROVALS

- Input voltage 220-240 / 50Hz
- AS60598
- EMC (CISPR15)
- C tick
- IPART



www.leddirectsolutions.com.au | 0438 78 78 78 | sales@leddirectsolutions.com.au



Disclaimer:

All LED Direct products must be installed by a qualified electrician in accordance with that countries current laws and health and safety legislation. It is the responsibility of the contractor, installer, owner, purchaser, and user to ensure the equipment is installed, maintained and operated in such a manner as to satisfy that countries current regulations and legislation.

Guardian HWLED

HAWK WING

Part No	Power consumption (Watts)	CCT	CRI	COB Lumen	Lumen Flux	Lifetime L70b50	Size Length x width x height (mm)	Tee Bar (mm)	Weight (Mass)
HWLED3540561500 (DALI)	35w	4000k	>80	5600lm	4200lm	50,000h	1496 x 296 x 76	1500 x 300	6.5kg
HWLED3540561500	35w	4000k	>80	5600lm	4200lm	50,000h	1496 x 296 x 76	1500 x 300	6.5kg
HWLED4040641500 (DALI)	40w	4000k	>80	6400lm	4800lm	50,000h	1496 x 296 x 76	1500 x 300	6.5kg
HWLED4040641500	40w	4000k	>80	6400lm	4800lm	50,000h	1496 x 296 x 76	1500 x 300	6.5kg
HWLED2740441200 (DALI)	27w	4000k	>80	4400lm	3300lm	50,000h	1196 x 296 x 76	1200 x 300	5.0kg
HWLED2740441200	27w	4000k	>80	4400lm	3300lm	50,000h	1196 x 296 x 76	1200 x 300	5.0kg
HWLED3240521200 (DALI)	32w	4000k	>80	5200lm	3900lm	50,000h	1196 x 296 x 76	1200 x 300	5.0kg
HWLED3240521200	32w	4000k	>80	5200lm	3900lm	50,000h	1196 x 296 x 76	1200 x 300	5.0kg
HWLED144022600 (DALI)	14w	4000k	>80	2200lm	1650lm	50,000h	596 x 296 x 76	600 x 300	3.0kg
HWLED144022600	14w	4000k	>80	2200lm	1650lm	50,000h	596 x 296 x 76	600 x 300	3.0kg
HWLED164026600 (DALI)	16w	4000k	>80	2600lm	1950lm	50,000h	596 x 296 x 76	600 x 300	3.0kg
HWLED164026600	16w	4000k	>80	2600lm	1950lm	50,000h	596 x 296 x 76	600 x 300	3.0kg

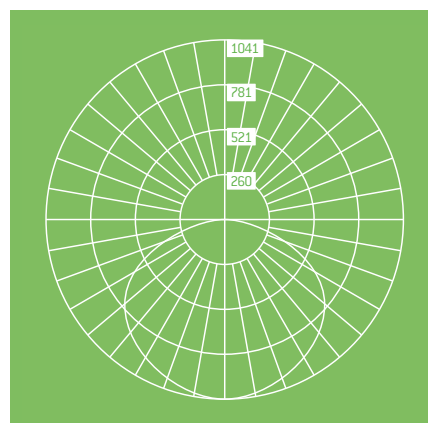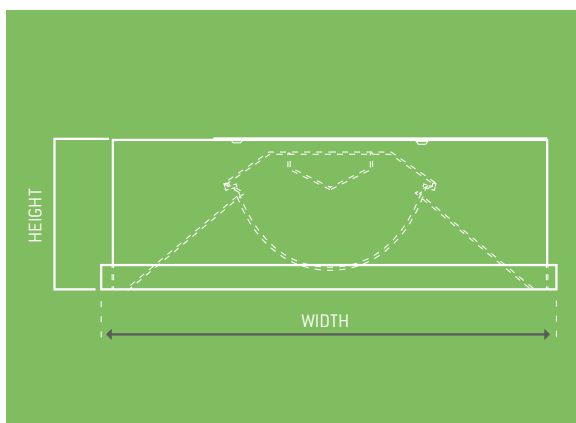

www.leddirectsolutions.com.au | 0438 78 78 78 | sales@leddirectsolutions.com.au

Disclaimer:

All LED Direct products must be installed by a qualified electrician in accordance with that countries current laws and health and safety legislation. It is the responsibility of the contractor, installer, owner, purchaser, and user to ensure the equipment is installed, maintained and operated in such a manner as to satisfy that countries current regulations and legislation.