

# LED DIRECT

OFFICE LIGHTING

## Guardian TRLED

TROFFER WITH OR  
WITHOUT AIRSLOTS



# Guardian TRLED

## TROFFER WITH OR WITHOUT AIRSLOTS

The LED Direct Troffer is available in a range of solutions and has been developed utilising the very latest technology, with a modern look and an ultra slim body and a maximum height of only 38mm for ease of installation into the smallest of ceiling cavities. Available with or without Airslots.

This fitting comes complete with a 100mm plexiglass frosted diffuser for perfect uniformity.

**Highly configurable, to suit your requirements.**

Size, SR Controller, Airslots, Colour temperature



STANDARD FEATURES	OPTIONS	COMPLIANCE / APPROVALS
<ul style="list-style-type: none"> <li>0.7mm Zinc Anneal Steel Body</li> <li>Powder coated white</li> <li>Y5 Diffuser</li> <li>Fits Metric T-Bars</li> <li>5 Year warranty</li> <li>Philips Running gear</li> </ul>	<ul style="list-style-type: none"> <li>Colour temperature options (kelvin)</li> <li>Dimming options</li> <li>DALI addressable</li> <li>Sensing options</li> <li>Powder coating colour options</li> <li>Plug &amp; lead options</li> <li>This fitting can be modified to order please contact our sales department for your requirements including imperial sizes</li> </ul>	<ul style="list-style-type: none"> <li>Input voltage 220-240 / 50Hz</li> <li>AS60598</li> <li>EMC (CISPR15)</li> <li>C tick</li> <li>SAA</li> <li>IPART</li> </ul>





[www.leddirectsolutions.com.au](http://www.leddirectsolutions.com.au) | 0438 78 78 78 | [sales@leddirectsolutions.com.au](mailto:sales@leddirectsolutions.com.au)

Disclaimer:  
 All LED Direct products must be installed by a qualified electrician in accordance with that countries current laws and health and safety legislation. It is the responsibility of the contractor, installer, owner, purchaser, and user to ensure the equipment is installed, maintained and operated in such a manner as to satisfy that countries current regulations and legislation.

# Guardian TRLED

## TROFFER WITH OR WITHOUT AIRSLOTS

Part No	Power consumption (Watts)	CCT	CRI	COB Lumen	Lumen Flux	Lifetime L70b50	Size Length x width x height (mm)	Tee Bar (mm)	Weight (Mass)
TR3030441200	30w	3000k	>80	4400lm	3850lm	50,000h	1195 x 295 x 38	1200 x 300	4.0kg
TR3040441200	30w	4000k	>80	4400lm	3850lm	50,000h	1195 x 295 x 38	1200 x 300	4.0kg
TR2230321200	22w	3000k	>80	3200lm	2800lm	50,000h	1195 x 295 x 38	1200 x 300	4.5kg
TR2240321200	22w	4000k	>80	3200lm	2800lm	50,000h	1195 x 295 x 38	1200 x 300	4.5kg
TR1830261200	18w	3000k	>80	2600lm	2300lm	50,000h	1195 x 295 x 38	1200 x 300	4.5kg
TR1830261200	18w	4000k	>80	2600lm	2300lm	50,000h	1195 x 295 x 38	1200 x 300	4.5kg
TR153022600	15w	3000k	>80	2200lm	1900lm	50,000h	595 x 295 x 38	600 x 300	2.5kg
TR154022600	15w	4000k	>80	2200lm	1900lm	50,000h	595 x 295 x 38	600 x 300	2.5kg
TR113016600	11w	3000k	>80	1600lm	1400lm	50,000h	595 x 295 x 38	600 x 300	2.5kg
TR114016600	11w	4000k	>80	1600lm	1400lm	50,000h	595 x 295 x 38	600 x 300	2.5kg
TR93013600	9w	3000k	>80	1300lm	1150lm	50,000h	595 x 295 x 38	600 x 300	2.5kg
TR94013600	9w	4000k	>80	1300lm	1150lm	50,000h	595 x 295 x 38	600 x 300	2.5kg

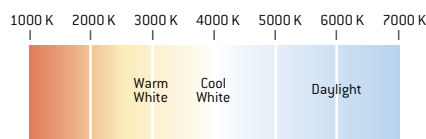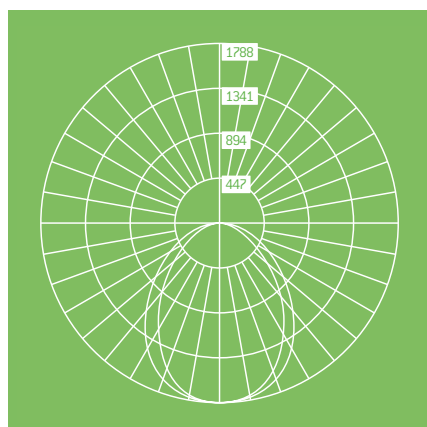

[www.leddirectsolutions.com.au](http://www.leddirectsolutions.com.au) | 0438 78 78 78 | [sales@leddirectsolutions.com.au](mailto:sales@leddirectsolutions.com.au)

**Disclaimer:**

All LED Direct products must be installed by a qualified electrician in accordance with that countries current laws and health and safety legislation. It is the responsibility of the contractor, installer, owner, purchaser, and user to ensure the equipment is installed, maintained and operated in such a manner as to satisfy that countries current regulations and legislation.