

LED DIRECT

OFFICE LIGHTING

**Guardian
BTW LED**

BASIC TROFFER WIDE



Guardian BTW LED

BASIC TROFFER WIDE

Our Basic Troffer Wide (BTW LED) is now available in LED and has been developed utilising the latest technology, with a modern look and an ultra slim body with a maximum height of only 38mm for ease of installation in the smallest of ceiling cavities.

This fitting comes complete with a 100mm plexiglass frosted diffuser for perfect uniformity.

Can be configured to suit your requirements.

Size, airslots, colour, Philips SR



STANDARD FEATURES

- 0.7mm Zinc Anneal Steel Body
- Powder coated white
- Y5 Diffuser
- Fits Metric T-Bars
- 5 Year warranty
- Philips Running Gear

OPTIONS

- Colour temperature options (kelvin)
- Dimming options
- DALI addressable
- Sensing options
- Powder coating colour options
- Plug & lead options
- SR Automation

This fitting can be modified to order please contact our sales department for your requirements including imperial sizes

COMPLIANCE / APPROVALS

- Input voltage 220-240 / 50Hz
- AS60598
- EMC (CISPR15)
- C tick
- SAA
- IPART



www.leddirectsolutions.com.au | 0438 78 78 78 | sales@leddirectsolutions.com.au



Disclaimer:

All LED Direct products must be installed by a qualified electrician in accordance with that countries current laws and health and safety legislation. It is the responsibility of the contractor, installer, owner, purchaser, and user to ensure the equipment is installed, maintained and operated in such a manner as to satisfy that countries current regulations and legislation.

Guardian BTW LED

BASIC TROFFER WIDE

Part No	Power consumption (Watts)	CCT	CRI	COB Lumen	Lumen Flux	Lifetime L70b50	Size Length x width x height (mm)	Tee Bar (mm)	Weight (Mass)
BTW30304412060	29.5w	3000k	>80	4400lm	3850lm	50,000h	1190 x 595 x 38	1200 x 600	6.0kg
BTW28404412060	28w	4000k	>80	4400lm	3850lm	50,000h	1190 x 595 x 38	1200 x 600	6.0kg
BTW21303212060	21w	3000k	>80	3200lm	2800lm	50,000h	1190 x 595 x 38	1200 x 600	6.0kg
BTW20403212060	20w	4000k	>80	3200lm	2800lm	50,000h	1190 x 595 x 38	1200 x 600	6.0kg
BTW17302612060	17w	3000k	>80	2600lm	2300lm	50,000h	1190 x 595 x 38	1200 x 600	6.0kg
BTW16402612060	16.5w	4000k	>80	2600lm	2300lm	50,000h	1190 x 595 x 38	1200 x 600	6.0kg
BTW1530226060	15w	3000k	>80	2200lm	1900lm	50,000h	590 x 595 x 38	600 x 600	4.0kg
BTW1540226060	15w	4000k	>80	2200lm	1900lm	50,000h	590 x 595 x 38	600 x 600	4.0kg
BTW1130166060	11w	3000k	>80	1600lm	1400lm	50,000h	590 x 595 x 38	600 x 600	4.0kg
BTW1140166060	11w	4000k	>80	1600lm	1400lm	50,000h	590 x 595 x 38	600 x 600	4.0kg
BTW930136060	9w	3000k	>80	1300lm	1150lm	50,000h	590 x 595 x 38	600 x 600	4.0kg
BTW940136060	9w	4000k	>80	1300lm	1150lm	50,000h	590 x 595 x 38	600 x 600	4.0kg

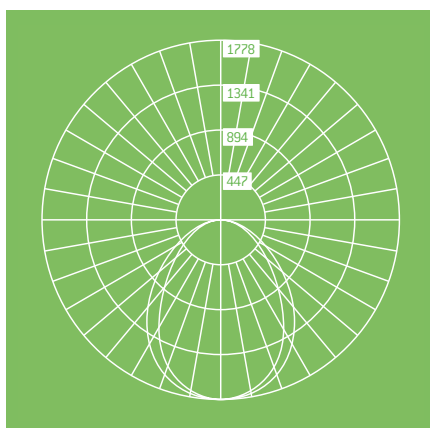

www.leddirectsolutions.com.au | 0438 78 78 78 | sales@leddirectsolutions.com.au

Disclaimer:

All LED Direct products must be installed by a qualified electrician in accordance with that countries current laws and health and safety legislation. It is the responsibility of the contractor, installer, owner, purchaser, and user to ensure the equipment is installed, maintained and operated in such a manner as to satisfy that countries current regulations and legislation.